





HD 14 TT

HD 14 TT - Rubber wheeled roller



- Optimum front view due to concaving front end
- Ergonomic driver platform
- Modern instrument panel
- Low machine height
- 3-point swivel joint for optimum driving comfort
- Crab steering
- Convenient maintenance and service



HD 14 TT - Rubber wheeled roller

HD 14 TT

	hts

3470 Operating weight with ROPS kg Operating weight, max. kg 4320 1605/1865 Axle load, front/rear kg 550/466,25 Load per tyre, front/rear kg

Machine dimensions

1276 -/-Max. working width Lateral overhang, left/right mm mm Ground clearance, left/right -/mm 305 Ground clearance, centre mm Turning radius, inside 2602 mm 10.5/80-16 Size of tyres, front/rear

Diesel engine

Manufacturer KUBOTA Version V2203 Number of cylinders

34,6/47,1/2700 34,6/46,4/2700 Power rat. ISO 14396, kW/PS/rpm Power rating SAE J1349, kW/HP/rpm Emissions standard EU/USA III A / Tier 4i Fuel tank, capacity L

Drive

Hydrostatic drive, front/rear Wheel motor/Wheel motor Speed, infinitely variable 0-10,0

km/h Climbing ability

Steering

Steering, type Steering, actuation Articulated steering hydrostatic, steering wheel

Steering angle +/-Oscillation angle +/-

Sprinkler system

Water sprinkler, type Pressure Actuation, water sprinkler interval/manual Water tank, capacity 285


Equipment

Crab steering up to 50 mm, Spring-mounted driver's seat, Comfort seat with seat belt, 2 multifunction drive levers, Operating hours counter, Indicator lights, Emergency stop switch

Optional equipment

Comfort driver cab, Lighting as per German Road Traffic Regulations, 2 spotlights on ROPS, Rotating beacon, Special colour, Sun roof, Sound insulation, Back-up alarm

Total length	L	2856	
Width	В	1296	
Total height	Н	2720	
Wheel base	Α	1950	
Width over tyres	Υ	1127/1276	
Diameter of tyres	R	810/810	
Height loading, min.	HI	1820	

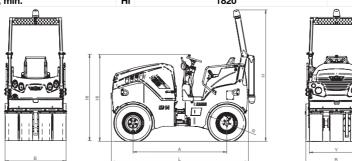



HD 14 TT 02.15 2122177 en-GB V7 - Further data on request / subject to change